



# OSCOR<sup>™</sup> *Green*



## Spectrum Analyzer

Two models available: OGR-24 (24 GHz) and OGR-8 (8 GHz)

U.S. PATENTS: 6,397,154; 7,058,530  
Additional Patents Pending



Whip antenna extension connector

Auto Switching Antenna Panel (utilizes 5 independent antennas)

Headphone Jack

8.4 inch (21.3 cm) High Resolution Touch Screen Display with "drag" & "move" controls

Hand Straps

Soft Function Menu Keys

Power Button

Built-In Speakers

DC Power Input (charges battery)

USB Port (type-A) for Memory/Keyboard/Mouse

Compact Flash Memory Port

Rotary Tuning Dial

Menu Control Keys

Numeric Keypad

Ethernet Port

USB Port (type-B)

Rubber Grips

### Antenna Panel Inputs

8 GHz - 24 GHz (OGR-24 only)

Antenna Panel Control

10 kHz - 8 GHz

(shown with protective port covers removed)

### Auxiliary Antenna Ports

Baseband Out

IF Out ports

Aux Control Port

Aux RF In 10 kHz - 8 GHz



# OSCOR<sup>™</sup> Green

## SPECTRUM ANALYZER

Two models available: 24 GHz (OGR-24) and 8 GHz (OGR-8)  
Specifications shown are for OGR-24 model

- Sweeps 10 kHz to 24 GHz in less than a second
- Detects pulsed, frequency hopping, and spread spectrum signals
- Weighs 9.6 lbs/4.4 kg, slightly more than a 1 gallon/2.5 liters of water
- Demodulates analog AM/FM audio/video signals

The OSCOR Green is a hand-held spectrum analyzer with a rapid sweep speed and easy to use functionality suited for detecting unknown, illegal, disruptive, and anomalous rogue transmissions across a wide frequency range.

- RF emissions analysis
- Investigating misuse of the crowded RF spectrum
- Site Surveys for communications systems (cell towers, microwave links, etc...)
- Wireless service providers and installers
- Security surveys for eavesdropping detection

World communications systems are rapidly expanding, especially in mobile land and satellite based broadband communication systems. Managing the RF spectrum is critical to many organizations such as hospitals, airports, laboratories, businesses, construction sites, mining operations, shipping ports, and large cities.

With world economies competing for business, high level corporate security requires eavesdropping detection for the protection of trade secrets, new product developments, and company sensitive information. Eavesdropping detection is also an important aspect of VIP protection. Executives, celebrities, and politicians rely on VIP security services to protect them from individuals wishing to harass or harm.

### Sweep & Operational Speed

The OSCOR Green 24 GHz model sweeps 24 GHz in 1 second in 12.2 kHz steps (OSCOR Green 8 GHz model sweeps 8 GHz in less than .5 seconds in 12.2 kHz steps). Fast sweep time, built-in antennas, and on-board software make the OSCOR Green easy to use and quick to deploy, optimizing total operational speed.

### Built-in Auto-Switching Multi-Antenna System

- 1 **SEAMLESS SPECTRUM VISIBILITY** from 10 kHz to 24 GHz or 10 kHz to 8 GHz (depending on the model) using the integrated Auto-Switching Multi-Antenna System.
- 2 **BUILT-IN 10 dB PRE-AMP** improves receiver sensitivity.
- 3 **CAPTURES COMPREHENSIVE SIGNAL ACTIVITY** without missing signals due to limited antenna range or from having to switch external antennas.

### Portability

The OSCOR Green is lightweight (9.6 lbs./4.4 kg), small and hand-held for easy mobility through target areas while collecting trace data and performing signal analysis. The built-in antennas and analysis software make it easy to deploy, and quickly capture and compare spectrum data from multiple locations.



## Patented Trace Analysis for Rapid Signal Detection

REI's trace analysis functionality provides full analysis of trace and signal data on-board without the need for a laptop.

- 1 **DISPLAYS 24 GHz OF LIVE TRACE DATA PER SECOND** at 12.2 kHz resolution.
- 2 **QUICKLY DETECTS LOCALIZED RF ENERGY TRANSMISSIONS OF ALL TYPES OF MODULATION**
- 3 **DETAIL ZOOM MODE INVESTIGATES AND ZOOMS** in on signals in the spectrum without interrupting full spectrum peak trace capture.
- 4 **PATENTED TRACE ANALYSIS** is built into functionality. Reference and target traces are quickly captured, stored, and compared for complete RF Mapping solution.

## Spectrogram

The Spectrogram collects trace data for long periods and saves it in a Spectrogram waterfall file that the OSCOR Green can recall and review on-screen. Intermediate peak traces are stored at a minimum of 10 second intervals with a spectrum resolution of 24.4 kHz. The intermediate peak hold trace is saved while sweeping at 24GHz per second.

## Raster Waterfall Display

Raster waterfall view generates a short term spectrogram of received traces.

## Persistence Display

Persistence view displays a trace graphic with varying color brightness based on the persistence of signals. This provides the ability to determine if multiple signals occupy the same frequency bands.

## Signal List Generation

The OSCOR Green collects peak trace data and then generates a signal list from the peak trace data. Moreover, the OSCOR Green can subtract a reference trace from a target sweep trace, and then creates a signal list unique to the target area.

- 1 **SIGNAL LIST GENERATED FROM TRACE DATA**
- 2 **MULTIPLE PASS SIGNAL LIST CREATED IN SECONDS**
- 3 **LOGS INTERMITTENT SIGNALS** (burst/packet & frequency hopping)

## Signal Analysis and Location

**SIGNALS** are easily located based on RSSI level change


**CORRELATION & RANGING** to locate and identify analog threats

**MASKING** compares Realtime traces to Peak traces to log newly detected signals over time


**MERGE** combines 2 peak traces into 1



Zoom to a frequency range while continuing full peak capture

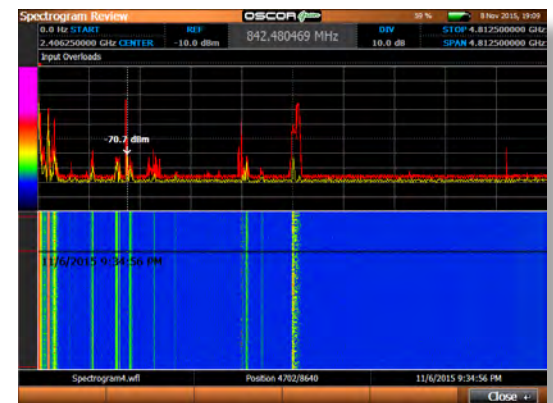

Spectrogram

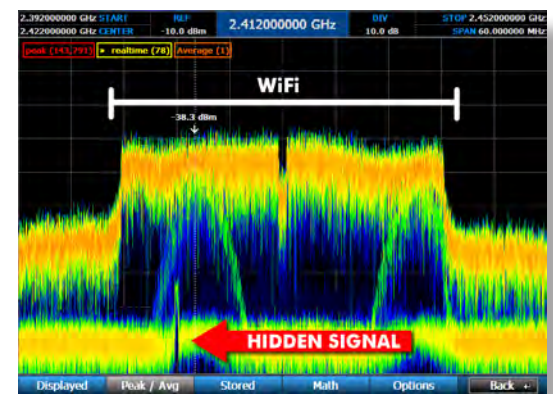

Persistence display



Generate signal lists automatically

## Built-In Suite of Demodulators

### AUDIO

- 1 FM wideband
- 2 FM narrowband
- 3 AM wideband
- 4 AM narrowband
- 5 Sub-carrier
- 6 Single Sideband

### VIDEO FORMATS

- 1 NTSC, PAL, SECAM
- 2 Wideband AM or wideband FM demodulation
- 3 Video demodulation displayed within screen

### DEMODULATION BANDWIDTHS

- 1 Audio: 200 kHz, 12.5 kHz, 6.25 kHz, 2 kHz
- 2 Video: 12.75 MHz, 6.375 MHz

CONTINUOUS SPECTRUM UPDATE AND DISPLAY WHILE DEMODULATING.




Demodulated video signal in Analyze mode

## Multi-Purpose Probe

The Multi-Purpose Probe plugs into the Auxiliary port for capturing:

- 1 Carrier Current signals between 10 kHz-150 MHz
- 2 Coax (F Connector) for single ended and general purpose measurements (75 ohm cable terminator included) with frequency range from 5 MHz to 2 GHz, CATV for in-line measurements of cable TV systems
- 3 VLF Magnetic Loop for analyzing low frequency spectrum activity from 20 kHz - 20 MHz
- 4 IR (700-1100 nm) for detecting line of sight infrared signals from 50 kHz to 1.2 GHz
- 5 VL (450 - 1100 nm) for detecting visible light transmissions from 50 kHz to 1.2 GHz

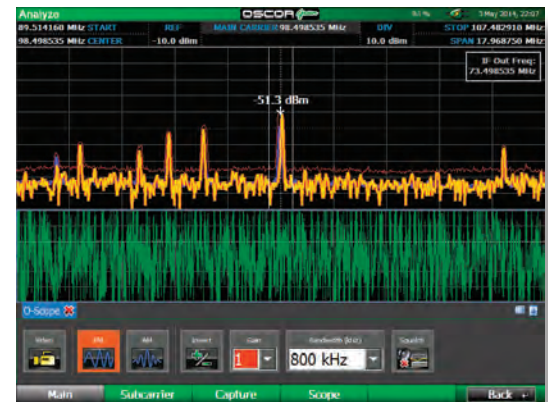

Demodulated audio signal in Analyze mode

## Directional Antenna

Directional response makes locating transmitters easier. The directional antenna is handheld or can be clipped to the antenna panel.

Range: 1.5 GHz to 8 GHz


Gain: Approximately 5 dB



## OSCOR Green Data Viewer Software

Data Viewer software is a free downloadable PC application that allows users to open, view, analyze, export, print and save OSCOR Green files including trace, signal, audio and screen capture files (i.e. waterfall).

Download the Data Viewer software at [www.reiusa.net](http://www.reiusa.net).

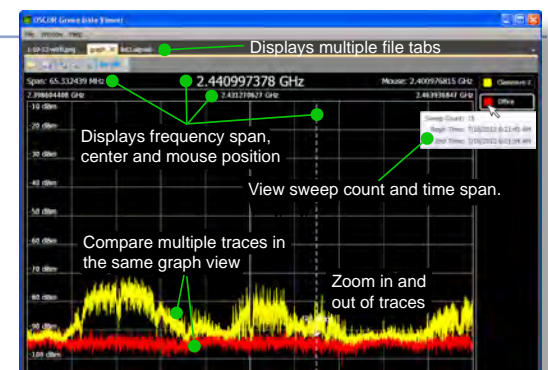



# OSCOR<sup>™</sup> Green

## SPECTRUM ANALYZER



### OSCOR<sup>™</sup> Green ADVANTAGES

#### FAST SWEEP TIME

24 GHz IN LESS THAN 1 SECOND (depending on model)

#### COMPLETE PACKAGE

#### INTEGRATED AUTO-SWITCHING ANTENNA SYSTEM

10 kHz to 8 GHz OR 24 GHz (depending on model)

#### TRACE ANALYSIS

COMPARE PEAK TRACES TO IDENTIFY RF ENERGY UNIQUE TO SPECIFIC ENVIRONMENTS

#### QUICKLY LOCATES RF SIGNALS

PORTABLE DESIGN MINIMIZES SET UP TIME WHEN MOVING FROM SITE TO SITE

#### EASY TO USE SOFTWARE FUNCTIONS



#### TRAINING BY REI INSTRUCTORS

REI operates the largest commercially available technical security training facility in the world. On-site training also available.

Course dates and registration online at [www.reiusa.net](http://www.reiusa.net) or email [sales@reiusa.net](mailto:sales@reiusa.net)



RESEARCH ELECTRONICS INTERNATIONAL  
455 SECURITY DRIVE

ALGOOD TN 38506 USA

TEL +1 931.537.6032 • 800.824.3190 (US ONLY)

FAX +1 931.537.6089

[sales@reiusa.net](mailto:sales@reiusa.net) • [www.reiusa.net](http://www.reiusa.net)

### MARKETING CHARACTERISTICS

#### RF SYSTEM

##### Frequency Range:

8 GHz Model (OGR-8): 10 kHz - 8 GHz

24 GHz Model (OGR-24): 10 kHz - 24 GHz

Sensitivity/Displayed Average Noise Level (DANL) (25 kHz Resolution Band Width)

Without Preamp = -100 dBm

With Preamp = -110 dBm

Sweep Speed: 24 GHz/second

Preamp: DC-8 GHz = 10 dB

Attenuation: DC-24 GHz = 0 dB, -10 dB, -20 dB, -30 dB

Dynamic Range:

Min/Max Range: 90 dB

SFDR: 80 dB

#### AUDIO SYSTEM

Demodulation Types: AM, FM

Filter Sizes: 800 kHz, 200 kHz, 12.5 kHz, 6.25 kHz, 2 kHz

Subcarrier Filters: 6.25 kHz, 12.5 kHz, 200 kHz

Headphone Output (low leakage headphones included)

Built-in Speakers

#### VIDEO SYSTEM

Formats: NTSC, PAL, SECAM

Demodulation: AM, FM

Filter Sizes: 12.75 MHz, 6.375 MHz

Subcarrier Filters: 6.25 kHz, 12.5 kHz, 200 kHz

#### ANTENNA SYSTEM

Built-in Auto Switching Antenna System:

Frequency: 8 GHz Model (OGR-8) = 10 kHz (useable) to 8 GHz

24 GHz Model (OGR-24) = 10 kHz (useable) to 24 GHz

#### INPUTS/OUTPUTS

Aux RF In: 10 kHz to 8 GHz

IF Out: 25 MHz wide centered at 75 MHz

Baseband Out: DC - 6 MHz

Expansion: Aux Control Port for MPP

#### USER INTERFACE

Integrated Touch Screen with 8.4" Display

Soft Keys and Rotary Optical Encoder

USB Port (A type): for peripherals (Keyboard, Mouse)

#### POWER SUPPLY

Universal Power Supply included: 100-240 VAC, 50-60 Hz

Removable Battery: Rechargeable Lithium ion, 2-3 hour runtime

#### EXTERNAL STORAGE CAPABILITY

Compact Flash (CF) Slot

USB-A Port

#### MECHANICAL

Dimensions: 11.5 in x 13.2 in x 3.0 in (29.2 cm x 33.5 cm x 7.6 cm)

Weight with Battery: 9.6 lbs (4.4 kg)

Case Dimensions (LWD): 19.68 in x 15.18 in x 5.46 in (49.99 cm x 38.56 cm x 13.87 cm)

Loaded Case Weight: 21.0 lbs (9.5 kg)

Operating Temperature: 0° C to +50° C

